

BOAT LINE

WOOD CLEANER


Wood bleach, ideal for teak

CODE 15-800

DESCRIPTION AND USE

Wood Cleaner deep cleans wood fibers, especially teak, removing the black and gray colour from the wood and restoring it to its natural color. If diluted 1:4 with water has an excellent cleaning effect.

APPLICATION DATA

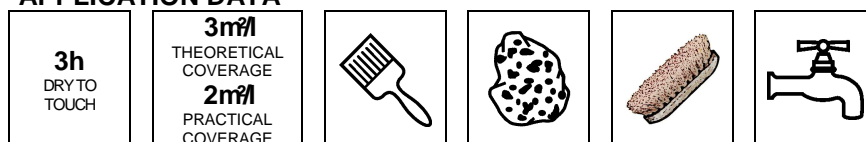

TECHNICAL DATA

COMPOSITION	Based on oxalic acid
SPECIFIC GRAVITY	102±0.05 Kg/L
AVERAGE VISCOSITY	(Gardner at 21°C) : 0.5 Poise
FILM THICKNESS	-
FINENESS OF GRIND	-
SOLIDS BY VOLUME	6±3%
V.O.C. % BY WEIGHT	0.05
FLASH POINT	Not flammable
MIXING RATIO BY VOLUME	-
POT-LIFE	-
COLOURS	Colorless
PACKAGING	ml 1000 – ml 500
STORAGE	Store in a cool, dry place with adequate ventilation

PAINT SYSTEM

Surface preparation: Clean the deck using a mixture of bleach for teak wood and water (1 part of product mixed to 4 parts of water).

Apply undiluted Wood Cleaner over damp deck with a brush. Scrub with a sponge or a soft bristle brush not to damage wood surface. After a few minutes rinse with large amounts of water. Allow to dry thoroughly and apply one coat of Teak Oil.

CONDITIONS FOR APPLICATION

Apply at a temperature between 5°C and 35°C. Do not apply in direct sunlight.
Keep from freezing.

INSTRUCTIONS FOR USE

Stir well before use.

The technical data are based on a reference temperature of 20°C unless otherwise specified and refer to the product undiluted and ready-to-use.

SAFETY PRECAUTIONS

Wear appropriate personal protective equipment; use safety equipment; use with adequate ventilation. For additional safety information, please see the package label.

This version supersedes any prior version.

Orazio Brignola S.p.A. reserves the right to update the above data, which are given for information only.
If products are not used beyond our control our liability is limited to the quality of the product itself.